

Product Technical data sheet

OXYGEN (KHROMA)



PRODUCT DESCRIPTION

Type	printed non-woven wallcovering
Ink	water based pigment inks
Printing method	rotary screen printing

PRODUCT SPECIFICATIONS

Total weight	150 ± 15 g/m ²
roll length x width	10,05 x 0,53 m
Substrate	non-woven FSC® certified

SUBSTRATE SPECIFICATIONS

Weight	130 g/m ²
Thickness	322 µm
Opacity	89 %
Reflectance factor	85 %
Composition	Cellulose, PES fiber, binder, additives

FIRE SAFETY

The products meet following requirement:


Euroclass B-s1,d0 (EN 13501-1)

HEALTH & ENVIRONMENT


EN15102:2007+A1:2011
DoP-CPR-130613
Wallcovering
Masureel int. NV, Kantstraat 1, B-8531 Hulste
Reaction to fire: Euroclass B-s1,d0
Release of formaldehyde: <120mg/kg
Release of heavy metals: NPD
Release of vinyl chloride monomer: <1mg/kg
Sound absorption: NPD
Thermal resistance: NPD



The mark of
responsible forestry

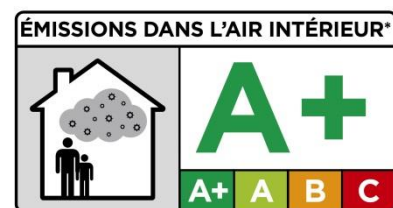

* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)

From production batch 09-2015 (Otherwise A)

The company meets the legal obligations on chemical substances, namely regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 Dec.2006, concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH).